


#### MACHINE MODEL

## RECORD 350

Manual and strong circular saw

#### Short description

RECORD 350 sawing machine is a robust and reliable saw for cutting metals (steel with a resistance of 70kg / m<sup>2</sup>). Equipped with swivel head and vice, it makes cuts from 0 ° to 45 ° to the right and left, also allowing cutting to 90 ° along the longitudinal axis.

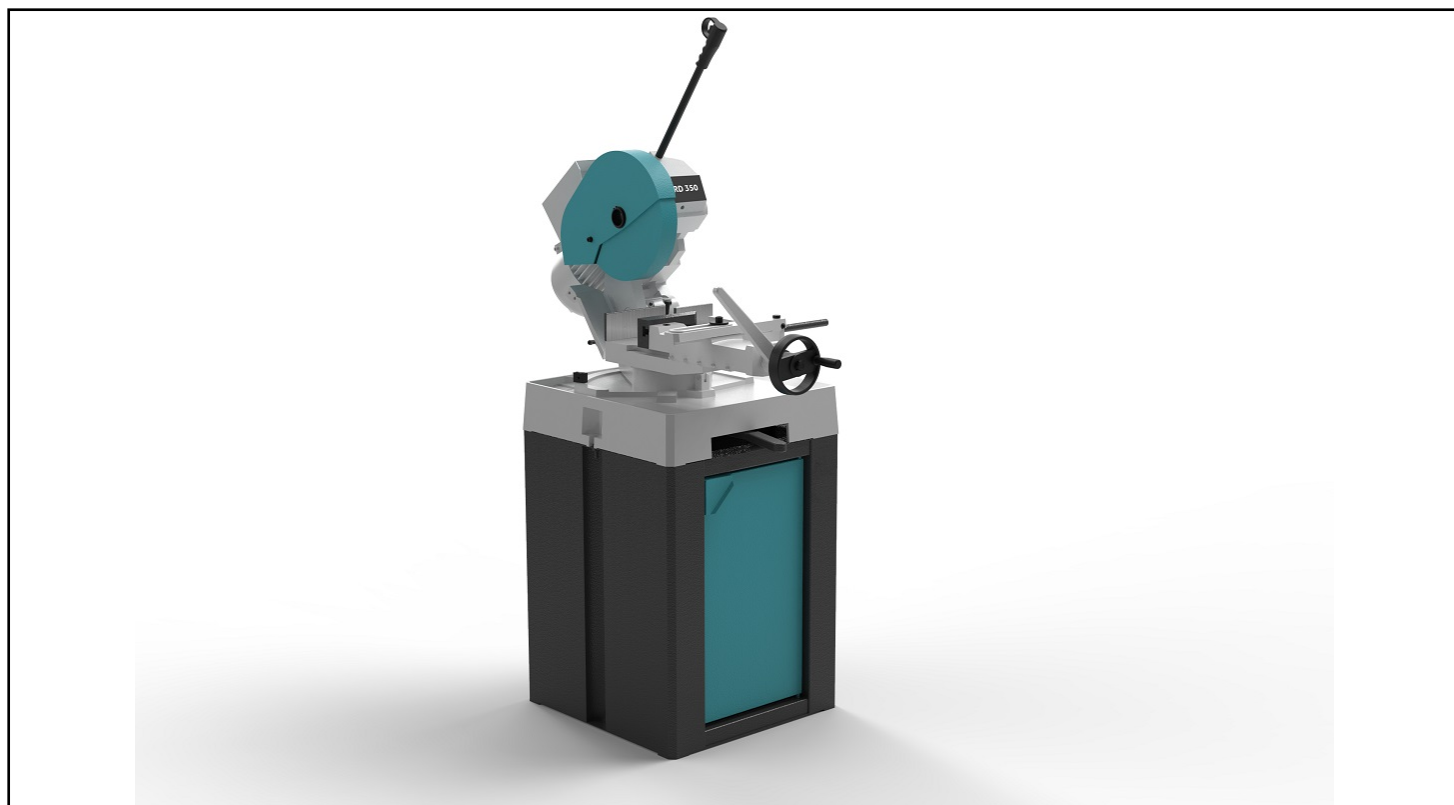


Cutting capacity at 0°	Round: 125mm - Square: 110mm - Rectangular: 160x90mm
Cutting capacity at 45°left	Round: 105mm - Square: 90mm - Rectangular: 80x100mm
Cutting capacity at 45°right	Round: 70mm - Square: 65mm - Rectangular: 60x70mm
Blade size	350mm
Blade hole	32mm
Blade speed	30/60rpm
Blade motor power	1.8/2.5KW
Coolant tank capacity	40l
Weight	206kg
Dimensions	600x1200x1060mm

## Features



### Bar stop

RECORD 350 disc saw is equipped with a standard anti-burr and adjustable bar stop for making cuts in series.

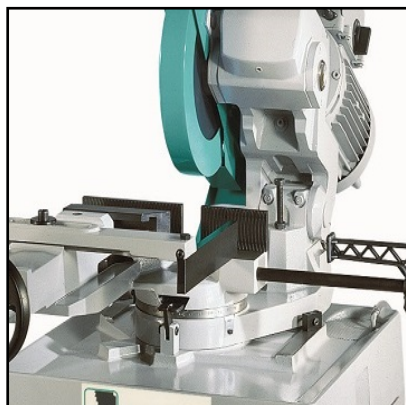

### Gearbox

Bronze wheel / endless screw in oil bath with adjustable bearings and elastic coupling.



### Start

The start button of RECORD 350 is located in the handle.



### Vice

Screw clamp with quick locking and adjustable guides; a special lever makes it swivel and removable.



### **Stops at 0° e 45°**


RECORD 350 is equipped with a system of adjustable stops at 0 ° and 45 ° on a graduated scale on the support surface.



### **Double vice (Optional)**

**OPTIONAL**

It's possible to order a double vice with 160mm opening.

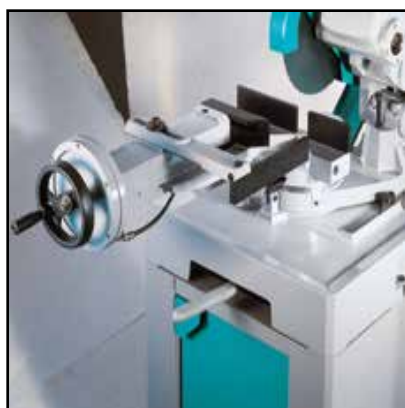

### **Pneumatic vice (Optional)**

**OPTIONAL**

PNEUMATIC VICE (OPENING/CLOSING SYNCHRONISED WITH THE HEAD MOTION)



### **Adjustable bar support (Optional)**

**OPTIONAL**

Bar support with adjustable height from 710 to 1100 mm. Capacity 150 kg



IBL floor stand (Optional)

OPTIONAL



Connection machine-loading roller table (Optional)

OPTIONAL

Connection between machine and loading roller table.



Connection machine-unloading roller table (Optional)

OPTIONAL

Connection between machine and unloading roller table.



Loading/Unloading roller table (Optional)

OPTIONAL

1st unit of roller conveyor compatible for both the loading and unloading sides.  
Length 2m, loading capacity 700kg.



**Loading/Unloading roller table (Optional)**

**OPTIONAL**

Following unit of roller conveyor compatible for both the loading and unloading sides. Length:2m, loading capacity:600kg.



**Unloading roller table with metric rod (Optional)**

**OPTIONAL**

1° unit of roller conveyor (unloading side) with metric rod and lenght stop.Length: 2m, loading capacity 700kg.



**Unloading roller table with metric rod (Optional)**

**OPTIONAL**

Following unit of roller conveyor (unloading side) with metric rod and lenght stop.Length: 2m, loading capacity 600kg.



**Vertical rollers (Optional)**

**OPTIONAL**

Pair of containment vertical rollers 300 mm made in steel, max 2 pairs for each element 2 m long; to use without rollers cover