





User-Friendly Touch-Screen



Precision Servo-Driven Stock Feed System

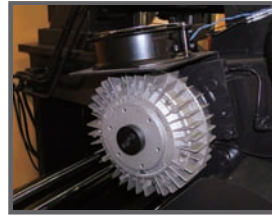

Electro-Magnetic Powder Brake

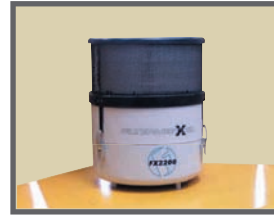

Oil Mist Filter (Option)



P-65B



P-100B

Model		P-65B	P-100B	P-150A
Capacity	●	10 - 65 mm.	15 - 100 mm.	25 - 150 mm.
	■	10 - 52 mm.	15 - 80 mm.	25 - 105 mm.
	■	10 - 52 mm.	15 - 80 mm.	25 - 120 mm.
Blade Motor		10 HP	15 HP	20 HP
Hydraulic Pump Motor		2 HP	3 HP	5 HP
Blade Speed		30 - 150 rpm	30 - 130 rpm	
Saw Blade Size		φ 280 x T2.0 mm.	φ 360 x T2.5 mm.	φ 460 x T2.7 mm.
Blade Feed		Servo motor and ball screw		Hydraulic motor and ball screw
Load Table (W x L)		1200 mm. x 5200 mm.		
Bar Feed		AC Servo motor and ball screw		
Automatic Feed Length		Single feed 8 - 600 mm. Multiple feed - 3000 mm.		Single feed 10 - 700 mm. Multiple feed - 3000 mm.
Automatic Chip Conveyor		Chain type		
Cooling		Air compressed oil mist		
Machine Weight With Table		3200 kg	3900 kg	4900 kg
Floor Space (mm.)	Machine	2600 W x 1900 L	2900 W x 1900 L	3100 W x 2075 L
	With 5M Load Table	2600 W x 6835 L	2900 W x 6835 L	2900 W x 7175 L

The Speed You Want And The Accuracy Your Product Demands



Rearview



P-150A





EVERISING
EVERISING MACHINE CO.

23, 8th Rd., Taichung Industrial Park Taichung 407, Taiwan.

Tel: +886-4-2350-5300 / 2359-3178

Fax: +886-4-2350-5420


E-mail: evrs@everising.com.tw

[http:// www.everising.com](http://www.everising.com)

www.everising.com

EVERISING
EVERISING MACHINE CO.

- ▶ Provides Many Various Choices For Sawing Machine.
- ▶ The Speed You Want And The Accuracy Your Product Demands.

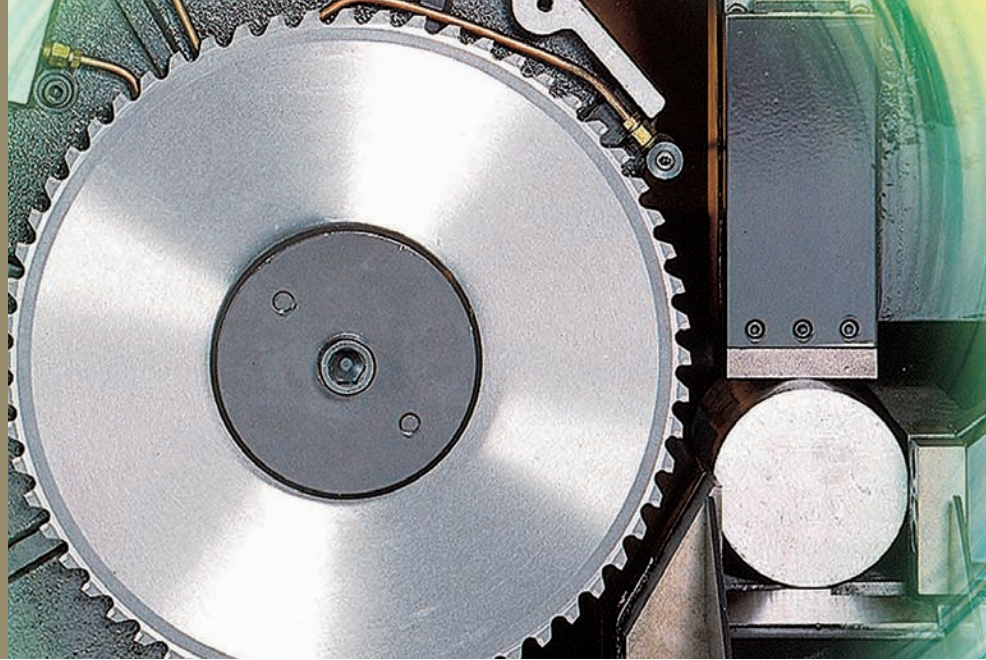

CIRCULAR SAW

CE ISO9001